

Specifications

Model name	MP-WU5603	MP-WU5503
Display system	3LCD	
Display device	Size of effective display area Number of pixels	0.64", aspect ratio 16 : 10 2,304,000 pixels (1,920 horizontal × 1,200 vertical)
Lens	Zoom	Manual (1.7x)
	Focus	Manual
	Lens shift	Manual (V : 0 ~ +56.5 %, H : ±4.6 %)
Light source	Laser diode	
Screen size	30 ~ 300 inch	
Light output (Brightness)*1	6,000 lm	5,000 lm
Contrast ratio (full white / full black)*2	1,500,000 : 1	
Speaker	16 W × 1 mono	
Displayable scanning frequency	Horizontal Vertical	15 ~ 106 kHz 24 ~ 120 Hz
Display	Computer Video	VGA, SVGA, XGA, WXGA, WXGA+, UXGA, WSXGA+, UXGA, Full HD, Mac 16", UXGA*
Resolution		NTSC, NTSC4.43, PAL, SECAM, PAL-N, PAL-I(60 Hz), 480@60, 480p@60, 576@50, 576p@50, 720@50/60, 1080@50/60, 1080p@50/60, 4K × 2K(3840 × 2160)@24/25/30*, 4K × 2K(4096 × 2160)@24/25/30*
Terminals	HDMI IN COMPUTER IN 1 COMPUTER IN 2 / MONITOR OUT VIDEO IN HDBaseT AUDIO IN AUDIO OUT CONTROL IN (RS-232C) LAN WIRELESS	HDMI connector × 2 Mini D-sub 15-pin connector × 1 Mini D-sub 15-pin connector × 1 RCA connector × 1 RJ-45 connector × 1 3.5mm stereo mini connector × 2, RCA connector (L, R) × 1 3.5mm stereo mini connector × 1 D-sub 9-pin connector × 1 RJ-45 connector × 1 USB type A × 1 (wireless adapter (option))
Network	Wired Wireless (Option)*5	100BASE-TX / 10BASE-T IEEE 802.11a/b/g/n/ac
Operating temperature	0 ~ 40 °C*6	(The brightness of light source may be reduced automatically over 35 °C)
Operating humidity	10 ~ 80%RH (non-condensing)	
Power requirements	AC 100 V ~ 120 V(50 / 60 Hz): 4.3 A AC 220 V ~ 240 V(50 / 60 Hz): 2.1 A	AC 100 V ~ 120 V(50 / 60 Hz): 3.8 A AC 220 V ~ 240 V(50 / 60 Hz): 1.9 A
Power consumption	AC 100 V ~ 120 V(50 / 60 Hz): 420 W AC 220 V ~ 240 V(50 / 60 Hz): 400 W	AC 100 V ~ 120 V(50 / 60 Hz): 370 W AC 220 V ~ 240 V(50 / 60 Hz): 360 W
Standby mode power consumption	Less than 0.5 W at saving mode*7	
Standard outside dimensions (W × H × D)	512 mm × 154 mm × 424 mm (20.2" × 6.1" × 16.7") (Including protruding parts), 506 mm × 136 mm × 424 mm (19.9" × 5.4" × 16.7") (Excluding protruding parts)	
Weight	Approx. 8.5 kg (18.7 lbs.)	Approx. 8.2 kg (18.1 lbs.)
Accessories	Remote control with two AA batteries, Power cord, Computer cable, User's manual, Security label, Lens cover, Hook metal, Screw, HDMI cable holder, Cable tie	
Optional parts	USB wireless adapter Air filter Mounting accessories	USB-WL-5G*8 UX43581 HAS-9110 (Bracket for fixing mount), HAS-104S (Slim adapter for fixing mount), HAS-204L (Standard adapter for fixing mount), HAS-304H (Long adapter for fixing mount)

*1: When PICTURE MODE is set to DYNAMIC, DYNAMIC BLACK is OFF and LIGHT OUTPUT is set to Normal 100%.

*2: When PICTURE MODE is set to DYNAMIC, DYNAMIC BLACK is ON and LIGHT OUTPUT is set to Normal 100%.

*3: UXGA (60 Hz) Reduced Blanking only.

*4: Only for HDMI1 and HDBaseT.

*5: Optional wireless adapter is needed.

*6: 0 ~ 40 °C at altitude from 0 m to 1,600 m, 0 ~ 35 °C at altitude from 1,600 m to 3,048 m.

*7: SAVING mode disables the functions of MONITOR OUT, AUDIO OUT, speaker sound, network communication, RS-232C control except POWER ON command, etc. in standby.

*8: The availability of the USB-WL-5G varies depending on the country and the region.

Environment

- Compliance with EU Directive RoHS*1
- Power saving mode engaged during standby
- Long Life mode
- No use of mercury lamp

*1: RoHS is the acronym of "Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment."

—Design and specifications are subject to change without notice.

• The projected images and comparison photos in this catalog are simulations. • LCD panels, polarizers and other optical components and cooling fans may need replacement after prolonged usage. For more details, please consult a sales representative. • Do not use in places where there is a lot of water, dampness, steam, dust, soot or tobacco smoke. This may result in fire or malfunction. • Optical components (light source, LCD panel, polarizing plate, PBS [polarizer beam splitter]) have limited service lives. They must be repaired or replaced if they are used for a long period of time. • During use and immediately after use, do not touch anywhere near the vents as these parts are extremely hot. • Optical components other than the light source: If the projector is used for six hours or more per day, they may need to be replaced in less than a year. • LCD panel: If the projector is used continuously for six hours or more, its replacement cycle may be shortened.

• Each product may have differences of colors brightness and focus due to manufacture variation. • Blu-ray Disc™ and Blu-ray™ are trademarks of Blu-ray Disc Association. • Crestron® and Crestron RoomView® are registered trademarks of Crestron Electronics, Inc. In the United States and other countries. • DICOM is the registered trademark of the National Electrical Manufacturers Association for its standards publications relating to digital communications of medical information.

• HDBaseT™ and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance. • HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. • Extron® is registered trademark of RGB Systems, Incorporated. • All other trademarks are the properties of their respective owners.

maxell


Maxell, Ltd. 5030 Totsuka-cho, Totsuka-ku Yokohama, 244-0003, Japan http://biz.maxell.com/en/display_equipment/

總辦事處及維修服務部 香港新界沙田安睦街28號永得利中心18樓 電話 : (852) 2113 8883 維修服務熱線 : (852) 2753 5386

澳門維修服務部 澳門葛士大馬路富大工業大廈4字樓F座 電話 : (853) 2871 9614


日立查詢熱線 : 2770 0377 www.hitachi-hk.com.hk

Dimensions

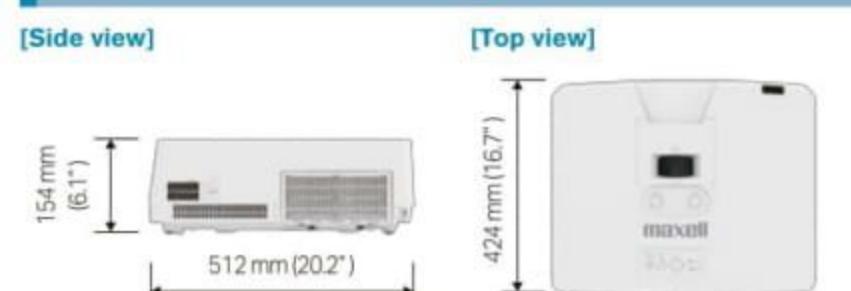


Projection Distance

Placed on the horizontal surface

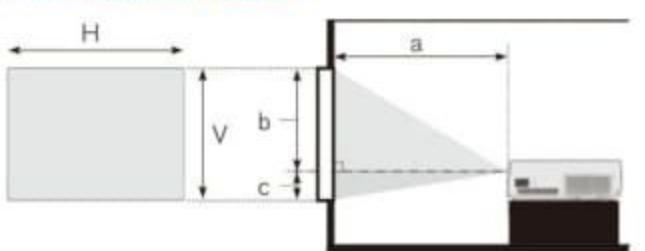

Suspended from the ceiling

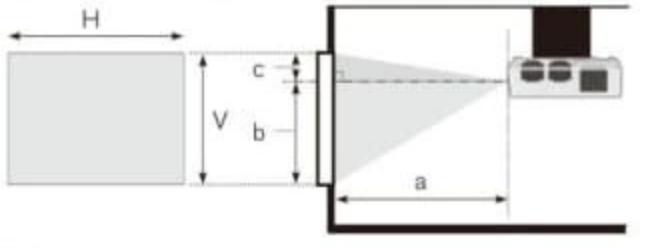

H × V : Screen size
a : Projection distance (from the projector's front panel to screen. Tolerance ±10%)
b : Screen height from lens center to top (when installed on a horizontal surface)
c : Screen height from lens center to bottom (when installed on a horizontal surface)


*The figures above are not drawn to scale.

MP-WU5603, MP-WU5503 16 : 10 screen

(1,920 × 1,200) (±10%)

Screen type	Screen size		Projection distance		Lens shift bottom side max.		Lens shift top side max.	
	H	V	a (min.)	a (max.)	b	c	b	c
(inch)	m	inch	m	inch	m	inch	cm	inch
60	1.3	51	0.8	32	1.7	67	3.0	119
80	1.7	68	1.1	42	2.3	92	4.1	161
100	2.2	85	1.3	53	2.9	116	5.1	202
120	2.6	102	1.6	64	3.6	140	6.2	244
150	3.2	127	2.0	79	4.5	177	7.8	307
200	4.3	170	2.7	106	6.0	238	10.4	411

Terminals

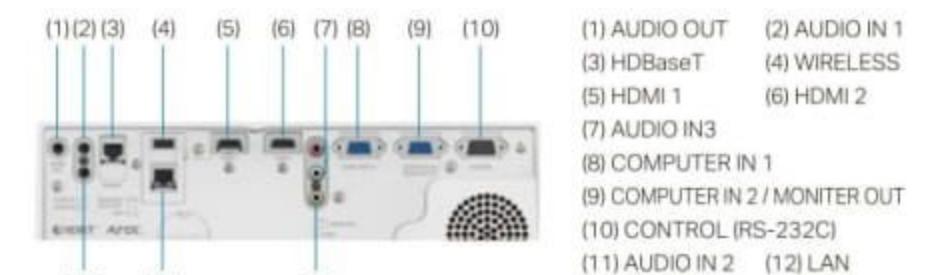

Laser Projector



High resolution and low noise laser projector, suitable for use in lecture rooms and mid-sized conference rooms



CAUTION



RG2



MP-WU5603
MP-WU5503

*Projected images are simulations



High Reliability and Stability


Long Life 20,000 hour Laser Light Source

Maxell's laser light source projectors have 20,000 hours^{*1} of light source life. Use for 50,000 hours^{*1} can be achieved in LONG LIFE 2 mode. Also, users may select their desired operation mode.


Furthermore, in addition to the light source, the phosphor wheel is also dust resistant, suppressing brightness level reduction by preventing dust from coming into contact with the optical parts.

Users can enjoy using the projector for long periods of time while maintaining its brightness. Additionally, though the device is a 5,000 lm projector, it has achieved a low noise of 32 dB. This is an optimal feature for presentations and seminars.

*1 For laser light source. The value is an estimate and may vary depending on the use environment or use condition.

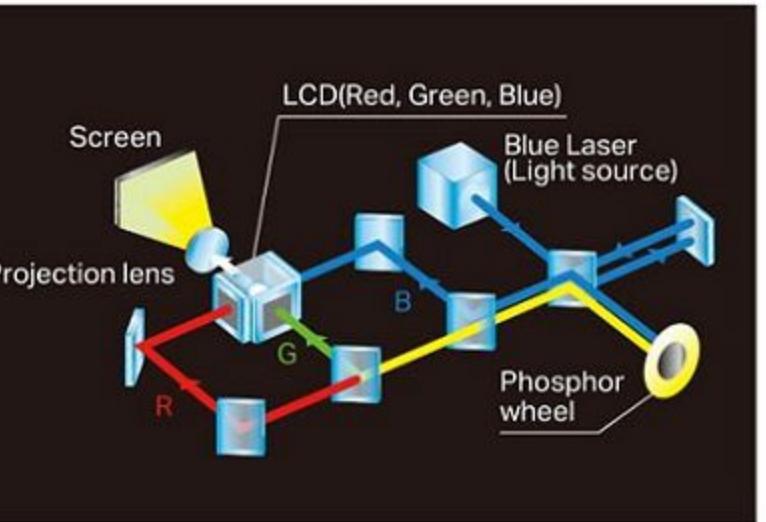

Brightness Deterioration Comparison between Light Output Modes

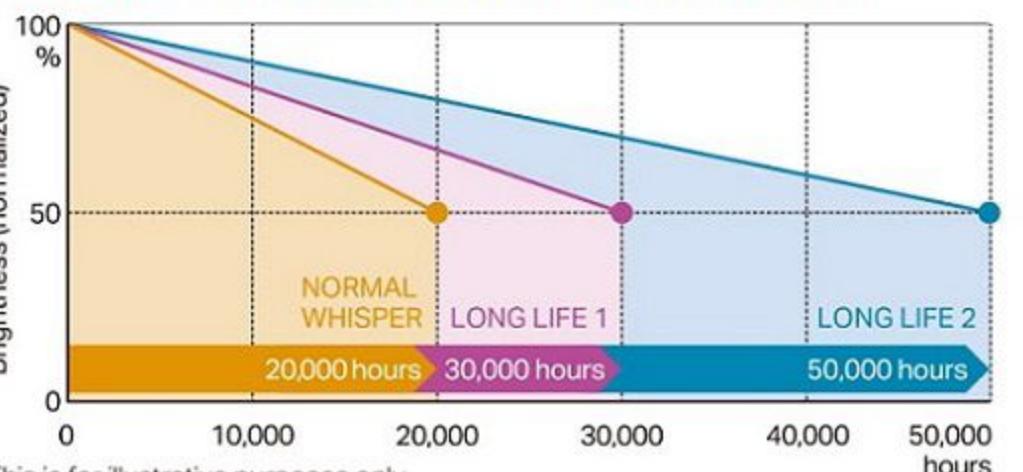

Hybrid Filter

Hybrid Filter requires less frequent maintenance and cleaning, making 20,000 hours of operation possible^{*5}.

*5 This is an estimate of the acceleration test performed under the condition of 50mg/m³ suspension dust concentration using JIS (Japanese Industrial Standards) standard powder. Cleaning intervals vary depending on the use environment.




High Image Quality

ACCENTUALIZER and HDCR

ACCENTUALIZER makes pictures look more real by enhancing shade, sharpness, and gloss to make pictures clearer. The HDCR function corrects blurred images caused by room lighting or outside light sources, and creates an effect similar to increasing contrast resulting in clear images even in bright rooms.

* Comparison photos are simulations.

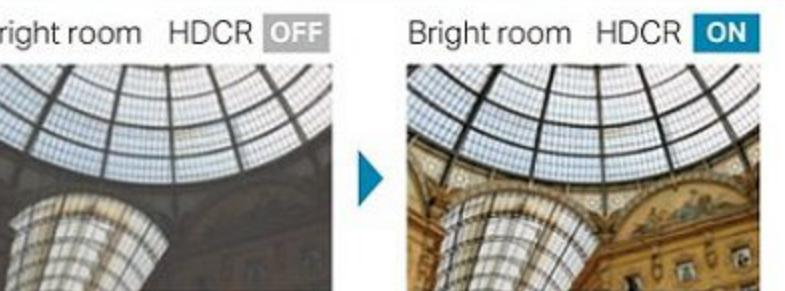

LINE UP



MP-WU5603
WUXGA 6,000 lm
3LCD LASER Light Source

Local availability may be limited.



MP-WU5503
WUXGA 5,000 lm
3LCD LASER Light Source



Installability

Lens shift and zoom lens

Featuring a powerful 1.7× manual zoom lens, the projectors allow for a greater range of installation possibilities. Manually shift the lens horizontally and vertically to position the image on the screen without causing keystone distortion.

*The figure are not drawn to scale.

Lens shift area (at ceiling mount position)

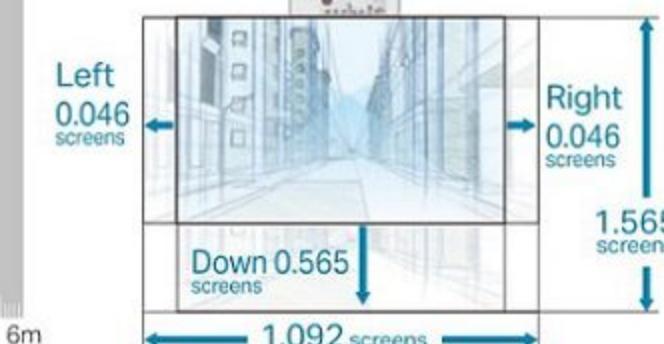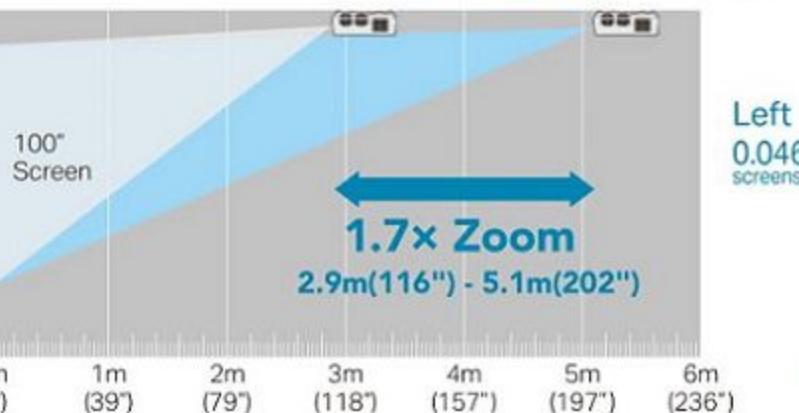

This projector provides great installation flexibility as it can be installed at various angle. By rotating the projector 90 degrees, you can project vertically long images (Portrait Projection).

Convenient Functions


Digital Connectivity

Equipped the HDBaseT™ and 2 HDMI input terminals. HDBaseT input, capable of transmitting signals switch no image degradation using a standard LAN cable (Cat5e or higher, shielded type) of up to approx. 100 m.



PbyP and PinP *6

You can simultaneously display 2 different picture signals in both the main area and sub area. In PbyP, displayed in the display size ratio. In PinP, the sub area position can be changed. This can be used when comparing documents and for discussions.

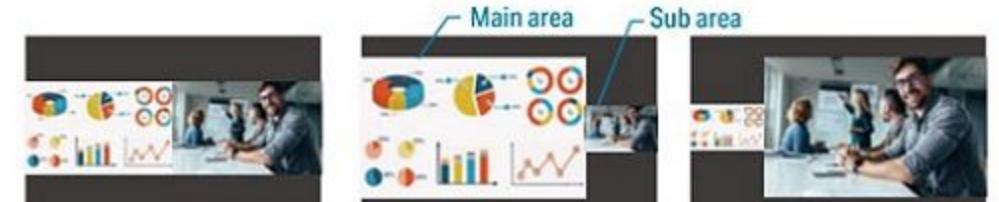


*6 The function is not available depending on combination of input signals.

Quick Start *7

When STAND BY MODE is set to QUICK START, projection starts within 1 second^{*8} of turning on. You can use to start presentation and class quickly.

*7 The standby power consumption of the mode is higher than the other modes.

*8 QUICK START is disabled in 30 minutes and the mode operating to same as NORMAL.

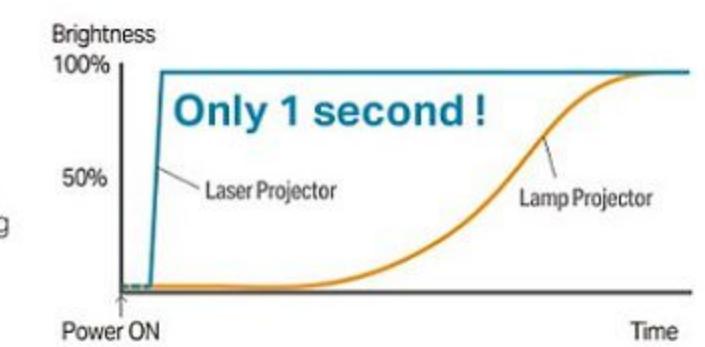

This is for illustrative purposes only.

Auto Power ON *9

The projector can turn the power on to display the input image automatically when the input signal comes from connected devices.



*9 Supported terminal are COMPUTER IN 1, HDMI 2 and VIDEO. This function is unavailable when STANDBY MODE is set to WOL or SAVING. This function may work unintentionally by connected external device.

Other Functions

- Easy Schedule Setting • DICOM® Simulation Mode^{*10} • 16W Internal Speaker • Smart Device Control & Monitoring^{*11} • Moderator Control Mode^{*12} • PIN lock • Key lock • Projector cloning setup application^{*13}

*10 This projector is not a medical device and is not compliant to the DICOM standard, and neither the projector nor this function should be used for medical diagnosis. *11 To use Smart Device Control, an exclusive application, "PJ Quick Connection" is required. Visit to the maxell projector web site. http://biz.maxell.com/en/display_equipment/ *12 To use Smart Device Control, an exclusive application, "LiveViewer" is required. Visit to the maxell projector web site. http://biz.maxell.com/en/display_equipment/ This function is for Windows users only. *13 To use an exclusive application, "Projector Data Cloning Application" is required. Visit to the maxell projector web site. http://biz.maxell.com/en/display_equipment/